

326-4634 Diesel Pump Technical File

SKU 1: G1C10003264634

CDP

SKU2: L3000D5D3264634

CR




DES

EL

EL

PUMP

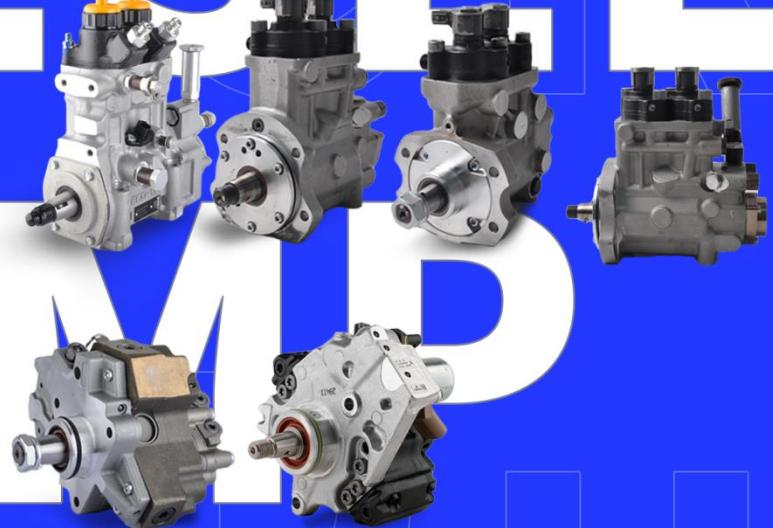

326-4634 Diesel Pump Technical File**Content**

| | |
|--|----|
| 1. 326-4634 Diesel Pump Introduction..... | 2 |
| 1.1. 326-4634 Diesel Pump Basic Information | 2 |
| 1.2. 326-4634 Diesel Pump Common Part Number | 2 |
| 1.3. 326-4634 Diesel Pump Parameters | 2 |
| 1.4. 326-4634 Diesel Pump Customization Service | 2 |
| 1.5. 326-4634 Diesel Pump Packaging List And Packaging Dimensions | 3 |
| 1.6. 326-4634 Diesel Pump Quality Control | 4 |
| 1.7. 326-4634 Diesel Pump Testing Standards and Certificates | 5 |
| 1.8. 326-4634 Diesel Pump Warranty Instructions..... | 5 |
| 2. 326-4634 Diesel Pump Technical Support..... | 6 |
| 2.1. 326-4634 Diesel Pump Utilized Location | 6 |
| 2.2. Reasons of 326-4634 Diesel Pump Not Working Normally | 7 |
| 2.3. Causes of 326-4634 Diesel Pump Being Damaged | 7 |
| 2.4. 326-4634 Diesel Pump Installations | 8 |
| 2.5. 326-4634 Diesel Pump Storage Standards | 8 |
| 2.6. 326-4634 Diesel Pump Technical Support Obtaining Methods..... | 9 |
| 3. 326-4634 Diesel Pump Purchase And Delivery..... | 9 |
| 3.1. 326-4634 Diesel Pump Purchase And Payment Term..... | 9 |
| 3.2. 326-4634 Diesel Pump Main Sales Markets | 9 |
| 3.3. 326-4634 Diesel Pump Declaration Requirements..... | 9 |
| 3.4. 326-4634 Diesel Pump Shipping Ways | 9 |
| 3.5. 326-4634 Diesel Pump Delivery Time..... | 10 |
| 3.6. 326-4634 Diesel Pump Logistics Time for Destination Out of China's Areas..... | 10 |
| 3.7. 326-4634 Diesel Pump Shipping Package | 10 |
| 4. Company Information..... | 12 |
| 4.1. Company Introduction..... | 12 |
| 4.2. Contact Information | 13 |
| 5. Copyright Statement..... | 13 |

326-4634 Diesel Pump Technical File

1. 326-4634 Diesel Pump Introduction

1.1. 326-4634 Diesel Pump Basic Information

| Title | Common Rail 326-4634 Diesel Pump 320D Series | Quality |
|-------|--|-----------------|
| SKU 1 | G1C10003264634 | China Made New |
| SKU 2 | L3000D5D3264634 | Re-manufactured |

1.2. 326-4634 Diesel Pump Common Part Number

(1) Diesel Pump Exchange Information

| Diesel Pump Part Number | OE Number |
|-------------------------|-----------|
| 326-4634 | 10R-7661 |

(2) Diesel Pump Application Information

| Vehicle Brand | Car Model | Engine Model | Production Date | Power (KW) | Horse Power | Emission (L) | Cylinder | Power Source (V) |
|---------------|-----------|--------------|-----------------|------------|-------------|--------------|----------|------------------|
| / | / | 319D | / | / | / | / | / | / |

(3) Diesel Pump's Common Writing Methods

326-4634, 3264634, 326 4634

1.3. 326-4634 Diesel Pump Parameters

Diesel Pump Adaptation System: Common Rail System

Diesel Pump Series: 320D Series

Diesel Pump Type: HEUI System

Diesel Pump Size: 33cm* 33 cm *28 cm

Diesel Pump Net Weight: 8.5kg

Diesel Pump Gross Weight: 9kg

Diesel Pump quality: China Made New/Re-manufactured

Diesel Pump Package Size: 36 cm*36cm *30cm

Diesel Pump Quality: High Pressure Diesel Pump

Diesel Pump MOQ: 1 piece

1.4. 326-4634 Diesel Pump Customization Service

(1) Diesel Pump Customization Service Coverage: Meet OEM manufacturers' customization needs for shell engraving, logo engraving, diesel pump internal packaging, diesel pump external packaging and labels, etc.

| NO. | 1 | 2 |
|---------|---|---|
| Picture |  |  |
| Name | Pump Housing Engraved Number | Power Diesel Pump Packing |

(2) Diesel Pump Customization Service Requirements:

The purchase of customized diesel pump is no less than **10** pieces.

The purchase of customized diesel pump boxes is no less than **1000** pieces.

⚠ Customized products involve the need of specify logo, the OEM manufacturer needs to provide trademark authorization and the sample of logo image file.

⚠ Once the customized diesel pump is sold, it can't be returned or exchanged if there is no quality problems.

1.5. 326-4634 Diesel Pump Packaging List And Packaging Dimensions

(1) Diesel Pump Parts List

| NO. | 1 | 2 | 3 |
|-------------|---|--|---|
| Picture |  |  |  |
| Name | Diesel Pump Assembly | Blue Anti-Rust Bag | Internal Packing |
| Description | Diesel pump part number: 326-4634 | Prevent diesel pump from rusting | Prevent the diesel pump from being damaged by external forces |
| NO. | 4 | 5 | 6 |
| Picture |  |  | / |
| Name | Diesel Pump Packing | Diesel Pump Protective Cover | / |
| Description | Place the diesel pump and accessories | Protect the diesel pump hole from contamination and blockage | / |

⚠ Minors are prohibited from using the diesel pump assembly, O-ring, Oil inlet protective cover,

diesel pump shell protective cover, oil return protective cover, VCI anti-rust bag, and bubble bag to avoid personal injury.

- ⚠ O-rings and repair kits are one-time installation accessories and need to be replaced when installed again
- ⚠ Oil inlet protective cover, diesel pump shell protective cover, and oil return protective cover are recyclable accessories and can be reused.
- ⚠ VCI anti-rust bags and bubble bags are non-degradable materials, please dispose of them properly after using.
- ⚠ The diesel pump and the installation part duct must be treated with appropriate sealing oil during installation.

(2) Diesel Pump Packaging Box Size



Pic No.1

| NO. | Name | Diesel Pump Packaging Size (Cm) |
|-----|---------------------------|---------------------------------|
| 1 | Diesel Pump Packaging Box | 36*36*30 |

1.6. 326-4634 Diesel Pump Quality Control

(1) Diesel Pump Testing

All parts of the diesel pump have undergone electrical characteristics testing, precision testing, high temperature testing, low temperature testing, withstand pressure testing, leakage testing, durability testing, and various working conditions testing.

(2) Diesel Pump Installation

In addition, the diesel pump production and installation process is quality controlled. Our company strictly follows the standard product installation data and product installation steps for installation, such as diesel pump stroke test, diesel pump solenoid valve tightening torque, diesel pump tightening torque.

(3) Diesel Pump Inspection

The factory inspection of the diesel pump has undergone three inspections: full inspection, random inspection, and batch inspection. Different brands of test benches are used to test the same diesel pump for no less than three times for factory inspection, and the diesel pump installation testing environment are progressed in dust-free workshop.

1.7. 326-4634 Diesel Pump Testing Standards and Certificates

We can provide the factory quality inspection test report of each diesel pump to ensure that each diesel pump delivered meets the engine performance indicators.

BOTEN

测试报告

4.05.2019 10:42:09

承检企业: _____

电话: _____ 地址: _____

传真: _____ 检测人: _____

客户单位: _____

电话: _____ 送检单位: _____

传真: _____ 客户姓名: _____

检测项目: _____

部件名称: 检测项目: _____

型号/部件号: _____

检测向: _____

检测结果

送检单号: 00000-0011

| 检测项目 | 检测结果 | 检测项目 | 检测结果 | 检测项目 | |
|----------|-------|------------|------|-------|----|
| IEC TEST | OK | 平均吸湿量 | 0.5 | 吸湿平衡度 | OK |
| RoHS | OK | 4 | OK | 吸湿平衡度 | OK |
| WRRM | OK | 147.3±10.5 | OK | 吸湿平衡度 | OK |
| Max | 201.5 | 219.3±14.4 | OK | 吸湿平衡度 | OK |
| TU | 26.4 | 24.6±2.5 | OK | 吸湿平衡度 | OK |
| EL | 14.1 | 15.0±4.8 | OK | 吸湿平衡度 | OK |
| QE | 0.7 | 4.5±1.8 | OK | 吸湿平衡度 | OK |

01 02 03 04 05 06 07 08 09 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189 190 191 192 193 194 195 196 197 198 199 200 201 202 203 204 205 206 207 208 209 210 211 212 213 214 215 216 217 218 219 220 221 222 223 224 225 226 227 228 229 230 231 232 233 234 235 236 237 238 239 240 241 242 243 244 245 246 247 248 249 250 251 252 253 254 255 256 257 258 259 260 261 262 263 264 265 266 267 268 269 270 271 272 273 274 275 276 277 278 279 280 281 282 283 284 285 286 287 288 289 290 291 292 293 294 295 296 297 298 299 300 301 302 303 304 305 306 307 308 309 310 311 312 313 314 315 316 317 318 319 320 321 322 323 324 325 326 327 328 329 330 331 332 333 334 335 336 337 338 339 340 341 342 343 344 345 346 347 348 349 350 351 352 353 354 355 356 357 358 359 360 361 362 363 364 365 366 367 368 369 370 371 372 373 374 375 376 377 378 379 380 381 382 383 384 385 386 387 388 389 390 391 392 393 394 395 396 397 398 399 400 401 402 403 404 405 406 407 408 409 410 411 412 413 414 415 416 417 418 419 420 421 422 423 424 425 426 427 428 429 430 431 432 433 434 435 436 437 438 439 440 441 442 443 444 445 446 447 448 449 450 451 452 453 454 455 456 457 458 459 460 461 462 463 464 465 466 467 468 469 470 471 472 473 474 475 476 477 478 479 480 481 482 483 484 485 486 487 488 489 490 491 492 493 494 495 496 497 498 499 500 501 502 503 504 505 506 507 508 509 510 511 512 513 514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 554 555 556 557 558 559 560 561 562 563 564 565 566 567 568 569 570 571 572 573 574 575 576 577 578 579 580 581 582 583 584 585 586 587 588 589 590 591 592 593 594 595 596 597 598 599 600 601 602 603 604 605 606 607 608 609 610 611 612 613 614 615 616 617 618 619 620 621 622 623 624 625 626 627 628 629 630 631 632 633 634 635 636 637 638 639 640 641 642 643 644 645 646 647 648 649 650 651 652 653 654 655 656 657 658 659 660 661 662 663 664 665 666 667 668 669 670 671 672 673 674 675 676 677 678 679 680 681 682 683 684 685 686 687 688 689 690 691 692 693 694 695 696 697 698 699 700 701 702 703 704 705 706 707 708 709 710 711 712 713 714 715 716 717 718 719 720 721 722 723 724 725 726 727 728 729 730 731 732 733 734 735 736 737 738 739 740 741 742 743 744 745 746 747 748 749 750 751 752 753 754 755 756 757 758 759 760 761 762 763 764 765 766 767 768 769 770 771 772 773 774 775 776 777 778 779 780 781 782 783 784 785 786 787 788 789 790 791 792 793 794 795 796 797 798 799 800 801 802 803 804 805 806 807 808 809 810 811 812 813 814 815 816 817 818 819 820 821 822 823 824 825 826 827 828 829 830 831 832 833 834 835 836 837 838 839 840 841 842 843 844 845 846 847 848 849 850 851 852 853 854 855 856 857 858 859 860 861 862 863 864 865 866 867 868 869 870 871 872 873 874 875 876 877 878 879 880 881 882 883 884 885 886 887 888 889 890 891 892 893 894 895 896 897 898 899 900 901 902 903 904 905 906 907 908 909 910 911 912 913 914 915 916 917 918 919 920 921 922 923 924 925 926 927 928 929 930 931 932 933 934 935 936 937 938 939 940 941 942 943 944 945 946 947 948 949 950 951 952 953 954 955 956 957 958 959 960 961 962 963 964 965 966 967 968 969 970 971 972 973 974 975 976 977 978 979 980 981 982 983 984 985 986 987 988 989 990 991 992 993 994 995 996 997 998 999 1000 1001 1002 1003 1004 1005 1006 1007 1008 1009 1010 1011 1012 1013 1014 1015 1016 1017 1018 1019 1020 1021 1022 1023 1024 1025 1026 1027 1028 1029 1030 1031 1032 1033 1034 1035 1036 1037 1038 1039 1040 1041 1042 1043 1044 1045 1046 1047 1048 1049 1050 1051 1052 1053 1054 1055 1056 1057 1058 1059 1060 1061 1062 1063 1064 1065 1066 1067 1068 1069 1070 1071 1072 1073 1074 1075 1076 1077 1078 1079 1080 1081 1082 1083 1084 1085 1086 1087 1088 1089 1090 1091 1092 1093 1094 1095 1096 1097 1098 1099 1100 1101 1102 1103 1104 1105 1106 1107 1108 1109 1110 1111 1112 1113 1114 1115 1116 1117 1118 1119 1120 1121 1122 1123 1124 1125 1126 1127 1128 1129 1130 1131 1132 1133 <input

Pic No.2

1.8. 326-4634 Diesel Pump Warranty Instructions

(1) Product Warranty Conditions And Instructions

It is necessary to provide pictures, videos, or test reports tested by the diesel pump inspection equipment when the diesel pump is abnormal during use as evidence to feed back to the salesman. Abnormal conditions are properly explained such as: 1. Smoke, 2. Engine shake, 3. Difficulty starting the engine, 4. Engine noise, 5. Oil leakage etc.

(2) Diesel Pump Warranty Coverage

- ① After customer receives the 326-4634 diesel pump within 15 days , if there is a performance failure and the product has no damage on surface, customer can choose to replace it or repair it;
- ② If the 326-4634 diesel pump has performance problems during the warranty period (6-12 months), and it is confirmed to be product's problems after being tested, you can contact our salesmen to replace the same model or a reworked product with the same performance for free;
- ③ If the diesel pump shell has obvious scratches, it can only be repaired and it will be returned as it is if the product is confirmed to be fault-free.

⚠️ **Tips:** For products not covered by warranty, our company can provide paid maintenance services. For

products after paid repaired, the same performance problem will have a free warranty period within 3 months from the date of repairing.

(3) Diesel Pump Is Not Covered By Warranty


- (1) The warranty period has expired.
- (2) Diesel pump failure caused by high temperature, high pressure, humidity, rain and snow, saline-alkali land, earthquake, and used in abnormal environment.
- (3) Customer disassembles or repairs the diesel pump personally resulting in damage to the diesel pump.
- (4) Diesel pump damage caused by man-made reasons (throwing, strong magnetic field magnetization, set fire).
- (5) Diesel pump failure or diesel pump damage caused by non-diesel pump design, technology, manufacturing, quality and other issues.
- (6) Diesel pump failure due to system pressure exceeding system approved pressure.
- (7) Diesel pump failure caused by system voltage exceeding approved voltage.
- (8) Diesel pump failure caused by impurities (water, lead, aluminum powder, iron powder, sulfide) in the system fuel exceeding the standard requirements.
- (9) Diesel pump failure caused by not installing according to the tightening torque specified in the vehicle engine maintenance manual (the tightening torque is too large or too small).
- (10) Diesel pump failure caused by not following the installation angle specified in the vehicle engine maintenance manual.
- (11) Diesel pump failure caused by not following the cleaning requirements specified in the vehicle engine maintenance manual.
- (12) Diesel pump failure caused by failure to replace consumable parts as specified in the vehicle engine maintenance manual.
- (13) Diesel pump failure caused by not complying with the intake system fit clearance and exhaust system fit clearance requirements specified in the vehicle engine maintenance manual.
- (14) Failure to replace the consumable parts and the fitting clearance of the oil inlet system pipeline and the diesel pump connection in accordance with the fuel intake system specified in the vehicle engine maintenance manual.

2. 326-4634 Diesel Pump Technical Support

2.1. 326-4634 Diesel Pump Utilized Location

- (1) **Example: The code of the diesel pump is shown as follows**

| NO. | Name |
|-----|------------------------------|
| A | Nameplate, logo, part number |

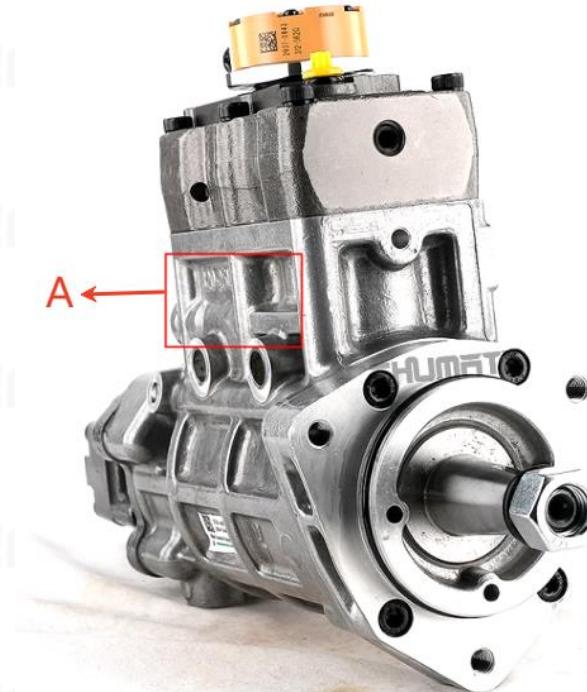

Pic No.3

2.2. Reasons of 326-4634 Diesel Pump Not Working Normally

- (1) There is air in the oil circuit of the engine fuel system.
- (2) Vehicle diesel pump oil supply system is not normal.
- (3) Engine common rail system oil leakage or pressure limiting valve damage.
- (4) There is a short circuit, cutting out and poor contact in the wiring harness connected to the diesel pump of the vehicle.
- (5) The long-term placement of the diesel pump causes the anti-rust oil to solidify, and the internal components are stuck or the oil holes are blocked.

⚠ Before installing, carefully check whether other components in the common rail system are damaged so as to prevent the diesel pump from not working properly after being replaced.

2.3. Causes of 326-4634 Diesel Pump Being Damaged

- (1) Failure to follow the engine maintenance manual during disassembly or installation may result in damage to the diesel pump.
- (2) The fuel oil used for the vehicle does not meet the standard cause damage to the diesel pump, such as: the water content in the fuel oil exceeds the standard, iron powder, aluminum powder, sulfide impurities exceed the standard, etc.
- (3) The engine is not regularly maintained according to the engine maintenance manual (please refer to the vehicle maintenance manual for the maintenance mileage). For example, failure to replace the lubricating oil of the engine system for a long time will cause abnormal wear of the engine, excessive exhaust gas volume or a large amount of carbon deposits inside the engine. The filter is not replaced during maintenance or the replaced filter cannot reach the original filter standard. all above reasons can cause damage to the diesel pump.
- (4) The abrasion of the oil pump produces iron powder and aluminum powder enter the diesel pump and cause damage to the diesel pump.

- (5) The deformation and abrasion of fuel tank result in iron powder or aluminum powder entering the diesel pump and causing damage to it.
- (6) The diesel pump is damaged due to replacement or adjustment of the relevant parts of the diesel pump. For example, the valve clearance does not meet the standard after the engine is repaired, the replacement or modification of the wiring harness connected to the diesel pump fails to meet the original standard.
- (7) The engine is overheated and overloaded for a long time working results in damage to the diesel pump.
- (8) The diesel pump will be damaged naturally at the end of its working life.
- (9) The diesel pump is magnetized (diesel pump parts' magnetic exceeded) causing the diesel pump to not work properly.

⚠ Before replacing the diesel pump, please check the engine parts carefully according to the engine maintenance manual to avoid the diesel pump being damaged again after replacement.

2.4. 326-4634 Diesel Pump Installations

(1) The replacement of the diesel pump must strictly follow the electrical system, the approved pressure of the low-pressure fuel intake system, the approved pressure of the high-pressure fuel circuit system, and fuel system replacement consumables requirements (including the low-pressure fuel circuit system filter and the high-pressure fuel circuit) specified in the vehicle engine maintenance manual.

(2) When install the diesel pump, strictly follow the manual of replacement of wearing parts of the fuel system, cleaning requirements for the connection between the fuel system and the diesel pump, the fitting clearance of the diesel pump take system, and the fitting clearance of the exhaust system, so that to ensure the service life of the engine and the normal operation of the diesel pump.

(3) When installing the diesel pump on the engine, it is necessary to clean the engine block, cylinder head and other parts connected to the diesel pump, and ensure that there is no dust, carbon deposits, water, rust spots, etc.

(4) If don't replace new washer shim, it can lead to: deformation of diesel pump, oil leakage and air leakage, which will cause serious damage to the diesel pump and diesel pump to break and cause damage to the engine.

(5) When installing the diesel pump on the engine, please carefully check the components related to the installation of the diesel pump are not deformed, such as the diesel pump pressure plate, screw, diesel pump rod and other accessories, and install it in strict accordance with the operation steps of the engine maintenance manual.

(6) It is forbidden to operate the bare diesel pump for a long time in an environment with serious dust pollution and corrosion to iron products.

(7) It is forbidden to operate the bare diesel pump for a long time in a strong magnetic field environment.

2.5. 326-4634 Diesel Pump Storage Standards

(1) Choose a suitable storage place

The warehouse and cargo yard where the diesel pumps are stored should be kept clean and dry, and away from the factory buildings that generate harmful gases and dust; do not mix with acid, alkali, salt and other substances; the storage place should have a good drainage system; the cargo yard should be flattened with gravel or furnace ash etc. to enhance the water permeability of the surface layer to keep the reservoir area dry.

(2) Strict storage requirements

Strict inspections should be carried out when the diesel pumps are put into storage, the surface cleaning work should be done well to remove water traces, oil stains, ash and other dirt, remove the rust and do anti-rust treatment in time. Packaged diesel pumps must be protected from damage.

(3) Keep the warehouse dry and do moisture-proof work

The relative humidity is usually below 70% for the diesel pumps placed in the room, and the corrosion of the diesel pumps is significantly reduced.

Diesel pumps must be stored in the warehouse, and they are forbidden to store in the same warehouse with commodities with high water content.

(4) Reasonable stacking

After the diesel pump is exposed to rain, the corrosion rate will increase significantly. The purpose of sealing is to isolate the diesel pump from rainwater and humid air, so the warehouse window should be checked in time to avoid rainwater entering the warehouse.

If the diesel pump package is damaged, it should be repaired or replaced; when the package is damp, the packaging material should be dried; if the original anti-corrosion and oil applied at the factory is found to be damaged or dried up, it should be cleaned and re-applied oil in time.

- ⚠ It is forbidden to leave the diesel pump exposed in the air for a long time.
- ⚠ It is forbidden to store acid, alkali, salt and other substances together with the diesel pump.
- ⚠ The unpacked diesel pump must be rust-proof during secondary storage.

2.6. 326-4634 Diesel Pump Technical Support Obtaining Methods

- (1) Diesel Pump Technical Data: <https://www.crdieselpump.com/download/>
- (2) Diesel Pump Technical Videos: <https://www.crdieselpump.com/videos/>
- (3) Diesel Pump Encyclopedia: <https://www.crdieselpump.com/category/news/encyclopedia/>

3. 326-4634 Diesel Pump Purchase And Delivery

3.1. 326-4634 Diesel Pump Purchase And Payment Term

Payment Method: T/T, Paypal, Alipay, WeChat

- ⚠ Please contact our salesmen for specific payment information.

3.2. 326-4634 Diesel Pump Main Sales Markets

Main Sales Markets Of Diesel Pump: Asia, Europe, North America, South America, Africa etc.

3.3. 326-4634 Diesel Pump Declaration Requirements

We can assist customers by providing the following documents for import customs clearance: contract, invoice, packing list, bill of lading, insurance policy, certificate of origin, etc.

3.4. 326-4634 Diesel Pump Shipping Ways

Destination in China areas: SF Express, Debon Express, the corresponding logistics company can be

provided according to customer requirements in special cases.

Destinations out of China's areas: DHL, UPS, FedEx, TNT air, ocean or other shipping methods required by customers.

3.5. 326-4634 Diesel Pump Delivery Time

Delivery Time: Send out within 3 – 7 working days after receiving payment (Except for special products and special cases).

3.6. 326-4634 Diesel Pump Logistics Time for Destination Out of China's Areas

DHL Logistics Time:

| Place Of Departure | Hong Kong | Other Countries Or Regions In Asia | Australia and New Zealand | Europe | America | Other Countries |
|--------------------|-----------|------------------------------------|---------------------------|--------|-----------|-----------------|
| China Mainland | 7 Days | 7 Days | 8 Days | 8 Days | 8-12 Days | 7-10 Days |

UPS Logistics Timeliness: Country or region of origin: Mainland China

| Country of Destination | Estimated Arrival Time | Country of Destination | Estimated Arrival Time | Country of Destination | Estimated Arrival Time |
|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|
| Japan | 3 Days | Britain | 5-7 Days | Egypt | 5-7 Days |
| Turkey | 5-7 Days | Singapore | 3 Days | Switzerland | 5-7 Days |
| Bahrain | 5-7 Days | Latvia | 7-10 Days | New Zealand | 7-10 Days |
| Sri Lanka | 5-7 Days | Thailand | 3 Days | Austria | 5-7 Days |
| Romania | 5-7 Days | Vietnam | 3-5 Days | Estonia | 5-7 Days |
| Malaysia | 3-5 Days | Israel | 5-7 Days | Mexico | 7-10 Days |
| France | 5-7 Days | USA | 5-7 Days | United Arab Emirates | 5-7 Days |
| Italy | 5-7 Days | Netherlands | 5-7 Days | Bengal | 7-10 Days |
| lebanon | 5-7 Days | Philippines | 3-5 Days | Greece | 7-10 Days |
| South Korea | 3 Days | Spain | 5-7 Days | Myanmar | 5-7 Days |
| Canada | 5-7 Days | Germany | 5-7 Days | Saudi Arabia | 7-10 Days |
| Portugal | 5-7 Days | Australia | 5-7 Days | South Africa | 7-10 Days |
| Denmark | 5-7 Days | Belgium | 5-7 Days | Ukraine | 7-10 Days |
| India | 7-10 Days | Qatar | 7-10 Days | Poland | 5-7 Days |
| Indonesia | 3-5 Days | Morocco | 7-10 Days | Pakistan | 7-10 Days |
| Kuwait | 7-10 Days | / | / | / | / |

⚠ The logistics time is for reference only, subjects are according to the actual arrival.

3.7. 326-4634 Diesel Pump Shipping Package

Domestic express packaging: Usually wrapped in waterproof scotch tape, such as picture No.1.

International express packaging: Wrapped with waterproof yellow tape after wrapping the black protective film, such as picture No. 2.

Pallet Shipping: Use fumigation free and recycling trays that meet export requirements, and use white wrapping protective film to wrap and bind with cable ties for the outside, such as picture No. 3, also, the products can be packaged according to customers' requirements.


- ⚠ The packing tray is made of plastic and can be recycled.
- ⚠ Transparent tape, yellow tape, black wrapping protective film, white wrapping protective film are non-degradable materials, please dispose of them properly.
- ⚠ Minors are prohibited from using transparent tape, yellow tape, black wrapping protective film, and white wrapping protective film to avoid personal injury.



Pic No. 4

Domestic express packaging:

Wrapped with Transparent tape

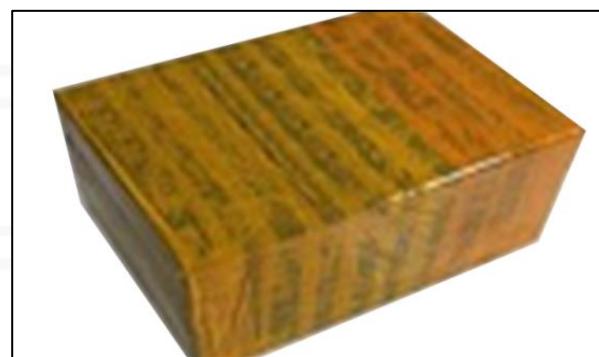

Pic No. 5

International express packaging:

Wrapped with yellow tape after wrapping black protective film



Pic No. 6

Pallet Shipping: Use pallet that meet export requirements, and use white wrapping protective film to wrap and bind with cable ties

4. Company Information



Pic No. 7

4.1. Company Introduction

📱 **Mobile Phone/WeChat:** +86-13410541523

📱 **Hong Kong Mobile Phone:** +852-67653519

📞 **Tel:** +86-755-23215133

📍 **Shenzhen Office:** 11-12, Floor 14, Building 13, Qinchengda Building, Exit A, Honglang North Subway Station, Bao'an District, Shenzhen, China Mainland

📍 **Shenzhen Office:** Exit C, Qiao Touxi Metro Station, No. 66 Chongqing Road, Fuhai Avenue, Bao'an District, Shenzhen, China Mainland

📍 **Hong Kong Office:** Jianfa Street Industrial Zone, Tuen Mun, New Territories, Hong Kong, China

📍 **After-Sales Service Address:** Please contact our salesmen to obtain and provide the corresponding product maintenance reasons (Reference: [1.8. 326-4634 Diesel Pump Warranty Instructions](#))

4.2. Contact Information

| Name | WeChat/Whatsapp |
|------|-----------------|
| Ruby | +86-13410541523 |

5. Copyright Statement

The content of “[326-4634 Diesel Pump Technical File](#)” is protected under copyright law by www.crdieselpump.com and Shenzhen Shumatt Technology Co., Ltd. Unauthorized use, such as copying, distributing, modifying, or creating derivative works, is strictly prohibited without obtaining prior written consent.

For specific uses, such as non-commercial or academic purposes, written permission must be secured. When possible, please include the name, title of the work, and a link to the original source. All rights are reserved, and any infringement may result in legal action. This notice safeguards the rights of the copyright holder and ensures appropriate usage of the material.